


# L298 2x2A DC Motor Shield for Arduino

## Overview

This 2x2A DC Motor Shield for Arduino allows Arduino to drive two channel DC motors. It uses a L298N chip which delivers output current up to 2A each channel. The speed control is achieved through conventional PWM which can be obtained from Arduino's PWM output Pin 5 and 6. The enable/disable function of the motor control is signalled by Arduino Digital Pin 4 and 7.

The Motor shield can be powered directly from Arduino or from external power source. It is strongly encouraged to use external power supply to power the motor shield.

- Logic Control Voltage: 5V (From Arduino)
- Motor Driven Voltage: 4.8 ~ 35V (From Arduino or External Power Source)
- Logic supply current  $I_{ss}$ :  $\leq 36\text{mA}$
- Motor Driven current  $I_o$ :  $\leq 2\text{A}$
- Maximum power consumption: 25W ( $T=75^\circ\text{C}$ )
- PWM, PLL Speed control mode
- Control signal level: High:  $2.3\text{V} \leq V_{in} \leq 5\text{V}$ , Low:  $-0.3\text{V} \leq V_{in} \leq 1.5\text{V}$

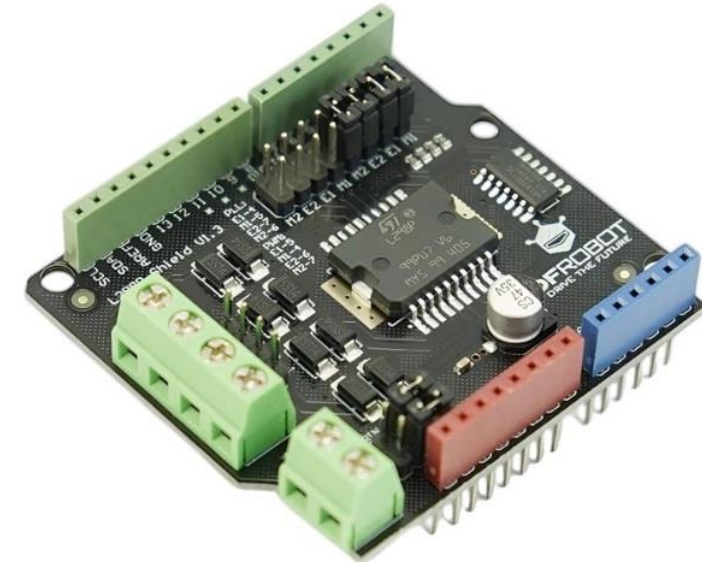


## Order Code

| Order Code | Brand   | Description                           |
|------------|---------|---------------------------------------|
| E06005-001 | DFRobot | L298 2x2A DC Motor Shield for Arduino |

# L298 2x2A DC Motor Shield for Arduino

## Diagram

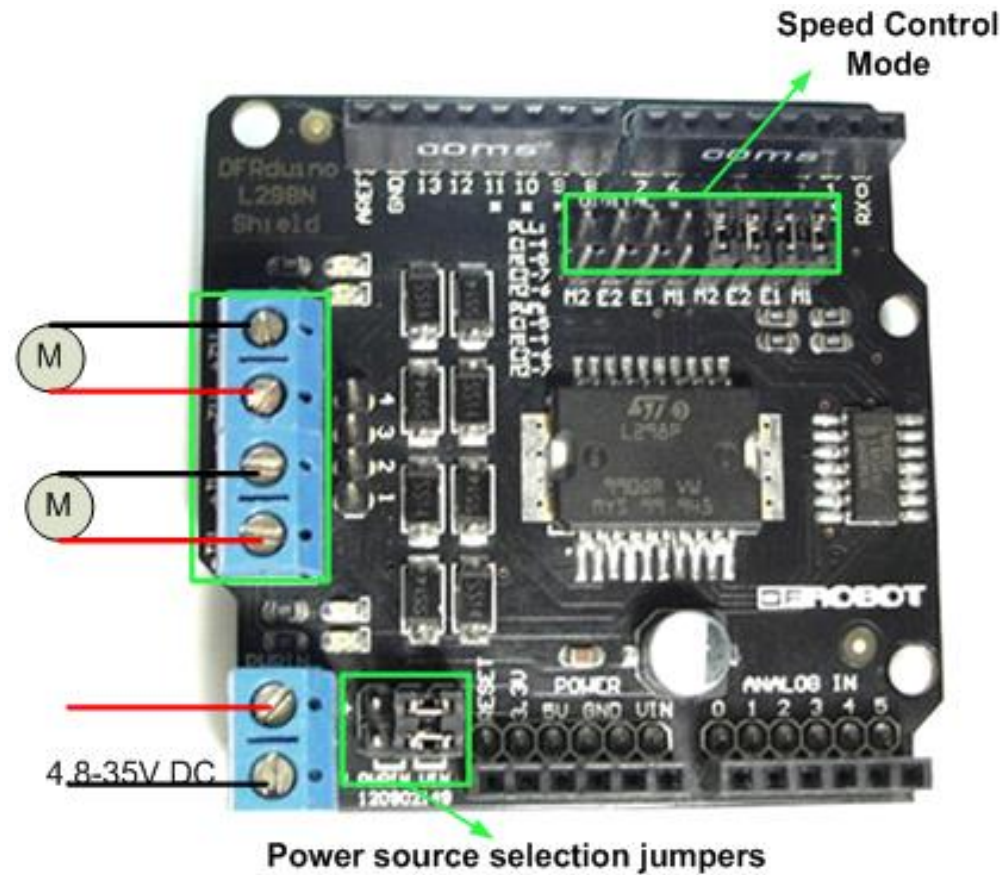


# L298 2x2A DC Motor Shield for Arduino

## Diagram




Control Mode Selection Jumpers: The shield supports PWM and PLL(Phased Locked Loop) control Modes. The PWM mode uses E1 and E2 to generate PWM signal. The PLL mode uses M1 and M2 to generate phase control signal.

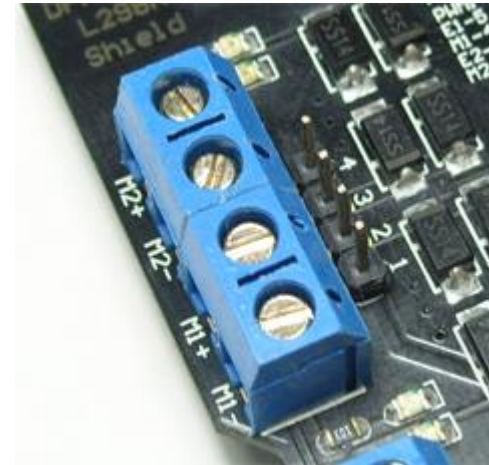

Motor Terminal: Two DC motors are connected to blue motor terminals. The male header behind the terminals are the same as the motor terminals.

# L298 2x2A DC Motor Shield for Arduino

## Diagram

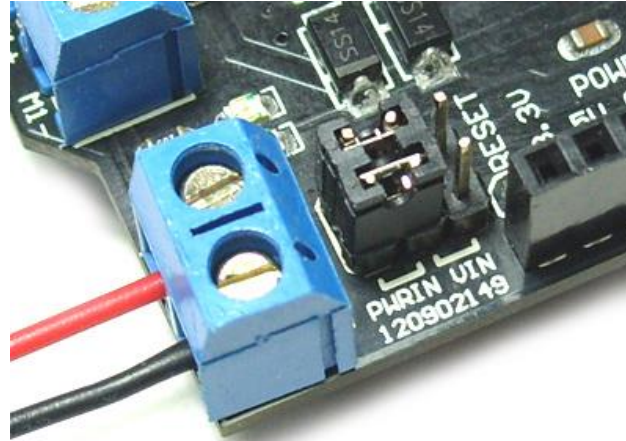

PWRIN: The motors can be powered by external power supply when the motor current exceeds the limits provided from the Arduino. The switch between external and Arduino power is implemented by two jumpers.

PWRIN: External Power

VIN: Arduino Power

NOTE: When the motor shield is powered by external power source, make sure the external power source and Arduino have the same GND.

# L298 2x2A DC Motor Shield for Arduino



## Control Signal Truth Table

| E1  | M1 |                   | E2  | M2 |                   |
|-----|----|-------------------|-----|----|-------------------|
| L   | X  | Motor 1 Disabled  | L   | X  | Motor 2 Disabled  |
| H   | H  | Motor 1 Backward  | H   | H  | Motor 2 Backward  |
| PWM | X  | PWM Speed control | PWM | X  | PWM Speed control |

# L298 2x2A DC Motor Shield for Arduino


## Pin allocation

| Pin       | Function                  |
|-----------|---------------------------|
| Digital 4 | Motor 1 Direction control |
| Digital 5 | Motor 1 PWM control       |
| Digital 6 | Motor 2 PWM control       |
| Digital 7 | Motor 2 Direction control |

"PWM Mode"

| Pin       | Function                  |
|-----------|---------------------------|
| Digital 4 | Motor 1 Enable control    |
| Digital 5 | Motor 1 Direction control |
| Digital 6 | Motor 2 Direction control |
| Digital 7 | Motor 2 Enable control    |

"PLL Mode"

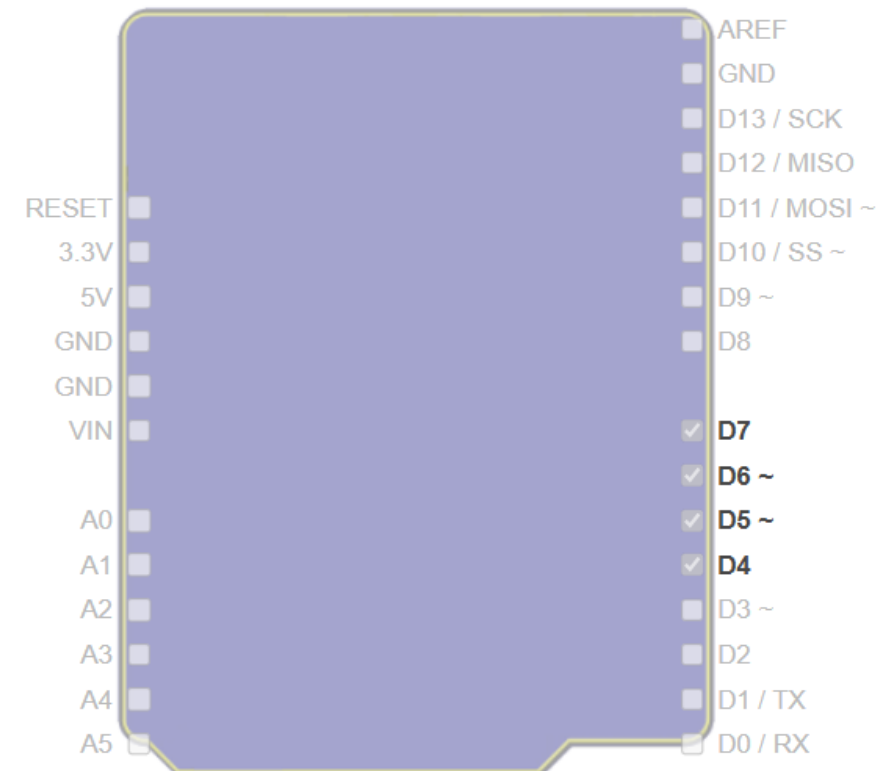

# L298 2x2A DC Motor Shield for Arduino



## Sample Code, PWM speed control

```
//Arduino PWM Speed Control:
int E1 = 5;
int M1 = 4;
int E2 = 6;
int M2 = 7;

void setup()
{
    pinMode(M1, OUTPUT);
    pinMode(M2, OUTPUT);
}

void loop()
{
    int value;
    for(value = 0 ; value <= 255; value+=5)
    {
        digitalWrite(M1,HIGH);
        digitalWrite(M2, HIGH);
        analogWrite(E1, value);    //PWM Speed Control
        analogWrite(E2, value);    //PWM Speed Control
        delay(30);
    }
}
```

# L298 2x2A DC Motor Shield for Arduino



## Sample Code, PLL speed control

```
//Arduino PLL Speed Control:
int E1 = 4;
int M1 = 5;
int E2 = 7;
int M2 = 6;

void setup()
{
    pinMode(M1, OUTPUT);
    pinMode(M2, OUTPUT);
}

void loop()
{
    int value;
    for(value = 0 ; value <= 255; value+=5)
    {
        digitalWrite(M1,HIGH);
        digitalWrite(M2, HIGH);
        analogWrite(E1, value);    //PLL Speed Control
        analogWrite(E2, value);    //PLL Speed Control
        delay(30);
    }
}
```

# L298 2x2A DC Motor Shield for Arduino

---



## Documents

- [L298 datasheet](#)

# L298 2x2A DC Motor Shield for Arduino



## Revision History

| Date       | Revision | Change description |
|------------|----------|--------------------|
| 30/10/2025 | 1.0      | Initial release    |